

AlwaysFresh®

Water the way you want it®

# RC-SF-1000

## Standard Flow 0.75 gpm

### Drinking Water System

### AlwaysFresh®

Water the way you want it®

#### 5 Stage Exclusive Patented Quick Change Design

Filter Protection Silver Zeolite Ions 

Lime Scale Protection\*

Built-in Pre Filter 5.0 micron

Fine Filtration 0.5 Micron

>650,000 m<sup>2</sup> of adsorptive chemical sites

\* claim not verified by IAPMO R&T

Rated capacity 1000 gallons.

Flush cartridge for 5 gallons each time cartridge is installed.

"This system was evaluated to a test capacity of 2000 gallons, 200% of the rated capacity of 1000 gallons."

Replace cartridge after 1000 gallons for optimum chemical reduction, when flow becomes inconveniently slow or at least once a year.

NOTE: This drinking water system must be maintained according to the manufacturer's instructions, including replacement of filter cartridge. "The end-user should not attempt to regenerate and reuse spent media from this product"

Waterline Technology®  
1904 Industrial Way  
Caldwell, ID 83605


1-800-522-3949

Reorder # RC-SF-1000

Date Installed \_\_\_\_\_


form # 2025 SF-1000 label

#### Installing Cartridge

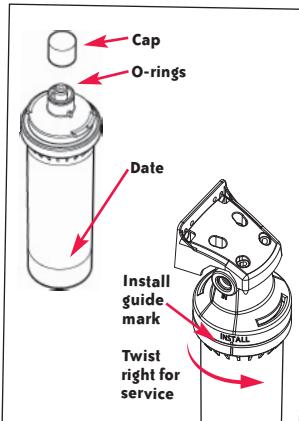

- 1) Write installation date on new filter label.
- 2) Remove and discard cap.
- 3) Inspect O-rings for any damage.
- 4) Make sure both O-rings are present and positioned correctly in the grooves.
- 5) Moisten O-rings with water.
- 6) Align cartridge guides to install position.
- 7) Push upward to seat O-rings into filter head.
- 8) Turn cartridge to right and align with service marks.
- 9) Run the faucet for at least two minutes to remove any air in the system.
- 10) Check for leaks.

#### Removing Cartridge

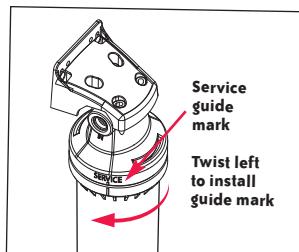

- 1) Turn off water supply to cartridge
- 2) Open faucet to relieve pressure and insure water supply is off.
- 3) Turn cartridge to left until aligned with install mark.
- 4) Pull cartridge down to remove it. A small amount of water may be discharged.

# RC-SF-1000


## Standard Flow 0.75 gpm

When this cartridge is inserted into one of the Alwaysfresh®

Filter heads (HFH38-NPT, HFC38-QC, HFHV38-QC)

This system Certified by WQA & IAPMO RT to CSA B483.1, NSF/ANSI 42, 53,401\* & NSF/ANSI/CAN 372

for specific performance claims as verified below and substantiated by test data.



#### Standard 42: Aesthetic Effects

##### Chemical Unit

Taste and Odor Reduction  
Aesthetic Chlorine Reduction

##### Mechanical Filtration Unit

Particulate Reduction: Class I reduction of particles >0.5 micron  
\*Qualifies this system for ANSI/NSF 401

#### Standard 53: Health Effects

##### Chemical Reduction Unit

Lead Reduction

##### Mechanical Filtration Unit

Turbidity Reduction  
Cyst Reduction

#### Standard 372: Low Lead Content

#### Standard 401: Reduction Micro-plastics -

ANSI/NSF 42 Particulate Reduction qualification for this standard

#### Operating Specifications

Min/Max working pressure: 30 psi (2.1 bar)/125 psi (8.6 bar), nonshock

Temperature: 35-100° F (2-38° C)

Service flow rate .75 gpm (2.85 Lpm)

Rated Service Capacity: 1000 gallons (3800 L)

For conditions of use, health claims and replacement parts see product performance data sheet.

California Waterboards Certificate Number 3329

Product performance is dependent upon incoming water conditions.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

The contaminants or other substances removed or reduced by this water filter device are not necessarily in your water.

©Waterline Technology® Protected under patents 6,695,891, 6,926,826, 6,977,006, 7,172,693, 7,476,314 and other Patents Pending

Manufactured at EPA Establishment Number 070932-ID-001