

# Model SF-1000

## Standard Flow (0.75gpm)

**AlwaysFresh®**  
Water the way you want it®

"This system was evaluated to a test capacity of 2000 gallons, 200% of the rated capacity of 1000 gallons"

### Chemical Reduction System for your home, office and business

#### 5 Stage Exclusive High Flow Design

**Stage 1: Built-in 5.0 Micron Pre-Filter** - Wrapped completely around the carbon block to filter dirt, sediment, filterable iron etc for increased cartridge life

**Stage 2: Fine Filtration** - Thick Compression molded powdered activated carbon block filters  
Class i reduction of particles >0.5 Micron

**Stage 3: Adsorption** - Specially formulated High Capacity carbon with over **650,000 square meters** of adsorption surface area


**Stage 4: Filter Protection** - Silver Zeolite technology **blended throughout** the filter for efficacy & longevity



**Stage 5: Scale Control\*** - Polyphosphate spheres are slowly released to provide **protection against hard water scale** build up in water using appliances.

\*claim not certified by WQA

Replacement cartridge PN#RC-SF-1000

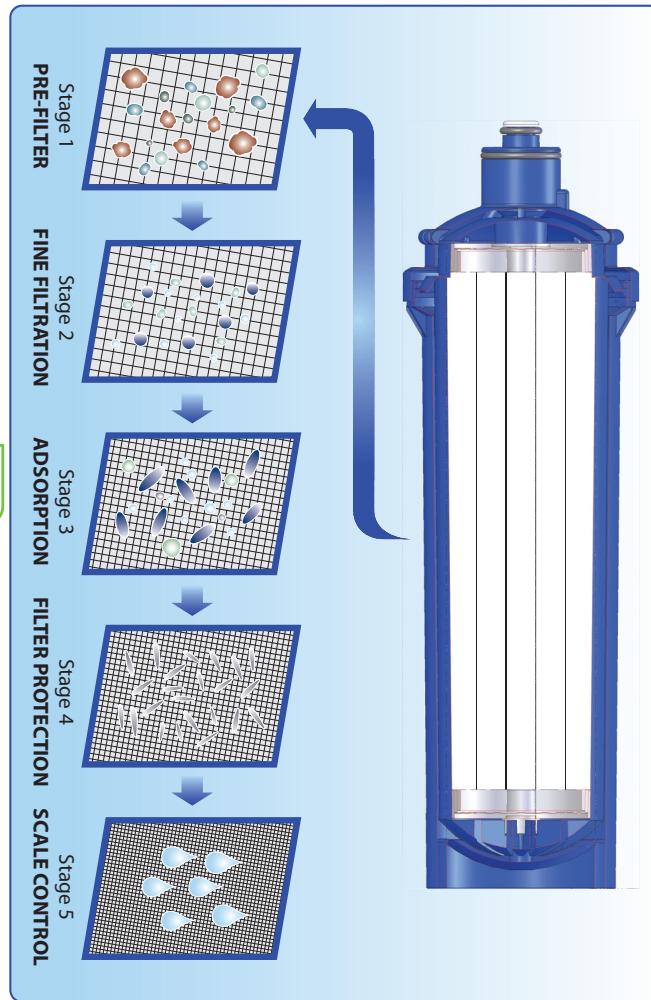

### Superior Performance

California Certification Number 3329



#### Exclusive Patented Quick Change Cartridge

- Sanitary Sealed quick change cartridge 1/4 turn, no tools required

#### Complete Installation Kit

- Under-sink to existing cold sink faucet (all quick connections)

#### Lead Free Design

- Virgin polypropylene materials and tubing - no lead

**Natural Minerals not filtered out of water!**

**Now with Certified Micro-plastics reduction**

**AlwaysFresh®**  
Water the way you want it®

 Waterline Technology®  
1904 Industrial Way  
Caldwell, ID 83605  
419-529-3949 direct  
419-529-8484 fax  
sales@waterlinetechnology.com www.waterlinetechnology.com

# Model SF-1000

High Flow (0.75 gpm)

Chemical Reduction System for your home, office and business



## Certified Performance

This system certified by WQA to CSA B483.1, NSF/ANSI 42, 53, 401, NSF/ANSI/CAN372



This system certified by IAPMO R&T to CSA B483.1, NSF/ANSI 42 & 53



For Specific performance claims as verified below and substantiated by test data

### NSF/ANSI Standard 42: Aesthetic Effects

#### Chemical Unit

Taste and Odor

Aesthetic Chlorine

#### Mechanical Filtration Unit

Particulate Reduction Class I, 0.5 micron

### NSF/ANSI Standard 53: Health Effects

#### Chemical Reduction Unit

Lead

#### Mechanical Reduction Unit

Turbidity

Cyst

NSF/ANSI/CAN 372 - Low Lead Content, 0.25% wetted parts

NSF/ANSI 401 - Microplastics Reduction

\* Claim not certified by WQA

The system & installation shall comply with applicable state & local regulations

## Operating Specifications

Min/Max working pressure:

30 psi (2.1 bar)/125 psi (8.6 bar), nonshock

Temperature: 35-100° F (2-38° C)


Service flow rate .75 gpm (2.85 Lpm)

Rated Service Capacity: 1000 gallons (3800 L)NOTE

**"The end-user should not attempt to regenerate and reuse spent media from this product"**


Product performance is dependent upon incoming water conditions. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

The contaminants or other substances removed or reduced by this water filter device are not necessarily in your water.

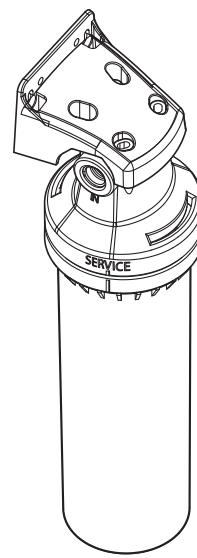


## Typical Installation Options:

Existing Cold Faucet Installation

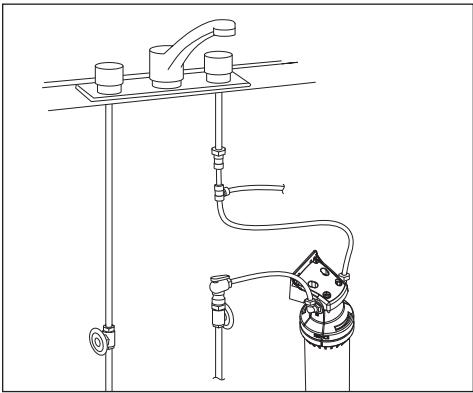

Undersink Separate Faucet Installation

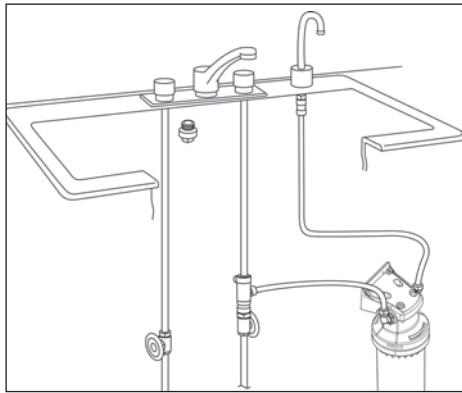

## Warranty:

**12 months from date of purchase or 24 months from date of manufacture. See warranty sheet for details**

Note: Separate faucet recommended for installation at kitchen sink for single filter head.

This system is a great addition to any home, office or business. Its flow rate is 1.5 x the competition without sacrificing performance. The capacity for the average family of 4-6 is a 1 Year Supply of drinking water.

Ideal system for homes that do not want to add a separate dispensing for the bath or bar area.

Connecting to the existing cold sink faucet saves cost of purchasing a separate dispensing tap, installation time & design issues without the need to drill holes in your countertop.

Great for bath or bar areas and for point of use water cooler filtration

**AlwaysFresh®**  
Water the way you want it®

 Waterline Technology®  
1904 Industrial Way 419-529-3949 direct  
Caldwell, ID 83605 419-529-9484 fax  
sales@waterlinetechnology.com www.waterlinetechnology.com

SF-1000 specs 2025