

Model HFC-1000-Dual

High Flow (3.0 gpm)



"This system was evaluated to a test capacity of >6000 gallons for Lead & 2000 gallons for all other claims for each cartridge!

Chemical Reduction System for your home, office and business

5 Stage Exclusive High Flow Design

Stage 1: Built-in 5.0 Micron Pre-Filter - Wrapped completely around the carbon block to filter dirt, sediment, filterable iron etc for increased cartridge life


Stage 2: Fine Filtration - Thick Compression molded powdered activated carbon block - Class 1 certified for removal of particles 0.5 Micron (1/50,000 of an inch) and larger

Stage 3: Adsorption - Specially formulated High Capacity carbon with over 2,000,000 square meters of adsorption surface area

Stage 4: Filter Protection - Silver Zeolite technology blended throughout the filter for efficacy & longevity



Stage 5: Scale Control* - Polyphosphate spheres are slowly released to provide protection against hard water scale build up in water using appliances.

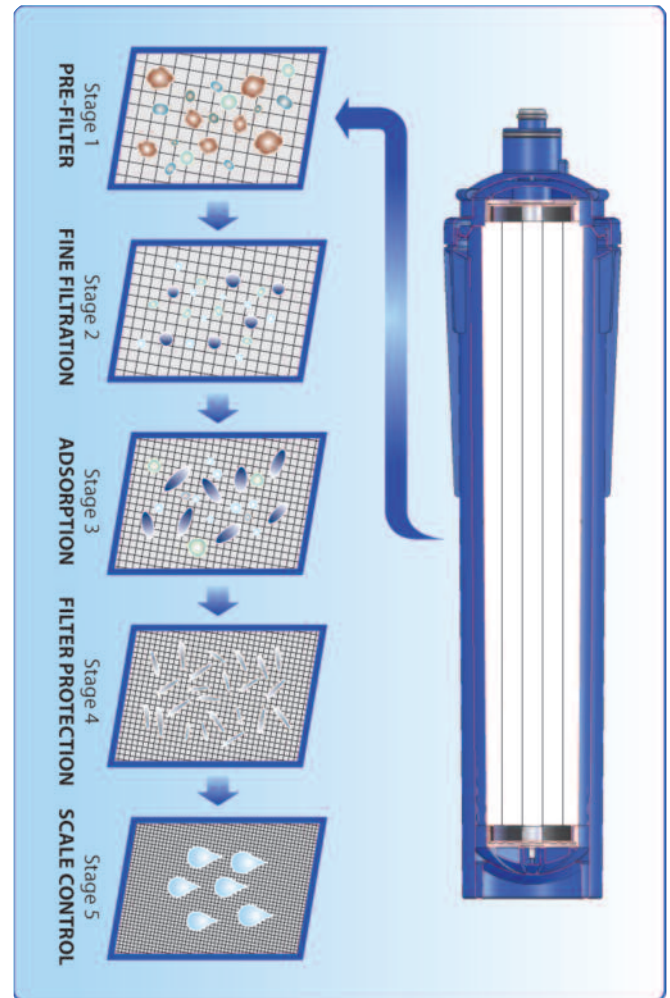

Replacement cartridge PN# RC-HFC-1000 quantity required 2.

Certified Performance

This system is certified by WQA and IAPMO R&T for conditions of use, health claims and replacement cartridge see the performance data sheet

California Certification Number 3330

Iowa Registration Number 20515



Exclusive Patented Quick Change Cartridge

- Filter head: Twin parallel flow w/3/8" Inlet & outlet ports
- Dual O-ring technology
- Sanitary Sealed quick change cartridge 1/4 turn, no tools required



Made in the USA

Complete Installation Kit

- Undersink to existing cold sink faucet (all quick connections)

Lead Free Design

- Virgin polypropylene materials and tubing - no lead

Certified for Lead reduction for >3000 gallons



©2019 Waterline Technology®

Protected under patents 6,695,891, 6,926,826, 6,977,006, 7,172,693, 7,476,314

and other Patents Pending. Manufactured at EPA establishment Number 070932-ID-001

Form HFC-1000Dual 2019 Specifications

Model HFC-1000-Dual

High Flow (3.0 gpm)

Chemical Reduction System for your home, office and business

Certified Performance

This system certified by WQA to CSA B483.1, NSF/ANSI 42 & 53



This system certified by IAPMO R&T to CSA B483.1, NSF/ANSI 42 & 53 & NSF P473



For Specific performance claims as verified and substantiated by test data

NSF/ANSI Standard 42: Aesthetic Effects

- Chemical Unit
 - Taste and Odor
 - Aesthetic Chlorine
- Mechanical Filtration Unit
 - Particulate Reduction Class I, 0.5 micron and larger

NSF/ANSI Standard 53: Health Effects

- Chemical Reduction Unit
 - MTBE
 - VOCs
 - TTHMs
 - Lead
- Mechanical Reduction Unit
 - Turbidity
 - Cyst

NSF Standard P473*

- Perfluorooctanoic acid (PFOA)
- Perfluorooctane sulfonic acid (PFOS)

WQA/ASPE/ANSI S-803

- Sustainability



* Claim not certified by WQA

Operating Specifications

- Min/Max working pressure: 30 psi (2.1 bar)/125 psi (8.6 bar), non shock
- Temperature: 35-100 F (2-38 C)
- Service flow rate 3.0 gpm (11.4 Lpm)
- Rated Service Capacity: 1000 gallons (3800 L)
- Rated Service Lead Capacity: 6000 gallons(22,800 L)

Product performance is dependent upon incoming water conditions. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

Conforms to NSF/ANSI 53 for MTBE, VOC, TTHM, & Lead reductions. See performance data sheet for individual contaminant's and reduction performance. Certified by the Water Quality Association to WQA/ASPE/ANSI S-803 for Sustainability

NOTE Independently Performance Tested to NSF/ANSI 53 for :
Lead reduction for >3000 gallons by the WQA Gold Seal laboratory for each cartridge for total capacity of >6000 gallons!

The contaminant's or other substances reduced by this water filter device are not necessarily in your water.




20.301"


4.013"

Typical Installation Options:

Existing Cold Faucet Installation with Existing Cold Sink Faucet Filtered

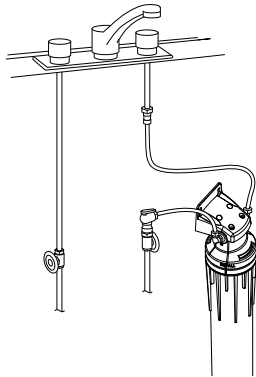

Under sink Separate Faucet Installation; Existing Cold Sink Faucet Non-Filtered

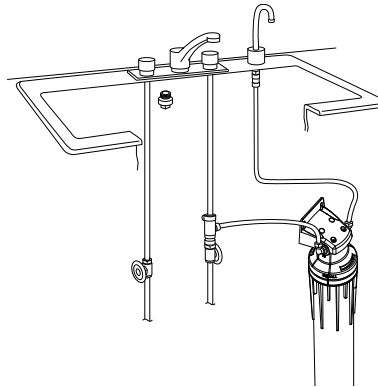

Warranty:

12 months from date of purchase or 24 months from date of manufacture. See warranty sheet for details

This system is a great addition to any home, office or business. Its flow rate is 6x the competition without sacrificing performance. The capacity for the average family of 4-6 is a 2 Year Supply of drinking water.

Ideal system for homes that do not want to add a separate dispensing faucet and those with high flow kitchen faucets. For homes with pot filler faucets, or higher flow dispensing faucets!

Connecting to the existing cold sink faucet saves cost of purchasing a separate dispensing tap, installation time & design issues without the need to drill holes in your countertop. The high flow will allow use of this system for all drinking, cooking, food preparation. *Over 80% of the Cold water used at the kitchen sink should be filtered, now its automatic!*

High Flow + High Performance = Convenience plus a healthier lifestyle!



Waterline Technology®
961 N. Main St., Ste 102 • P.O. Box 396
Mansfield, OH 44903

Phone: 419-529-3949 • Sales/Technical Service: 1-800-522-3949
Fax: 419-529-8484 • www.waterlinetechnology.com

Form# 2019 HFC-1000DUAL